



1. Physical Feature


1.1 Picture



1.2 Dimension

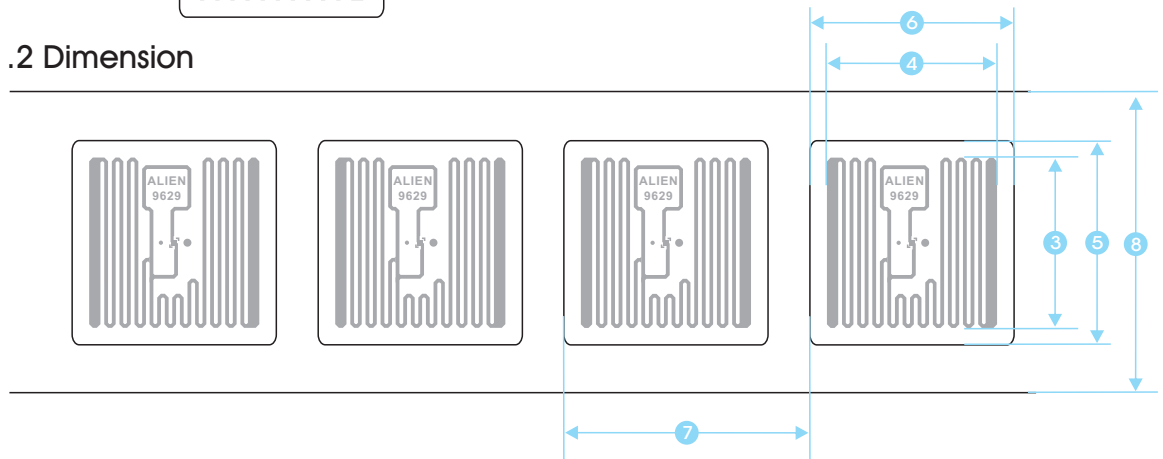

NO.	Item	Dimension mm
1	Core ID	3inch (76.2±0.5)
2	Roll OD	≤185
3	Antenna Length	22.5±0.5
4	Antenna Width	22.5±0.5
5	Lable length	27±0.5
6	Lable width	27±0.5
7	Lable pitch	32.544±0.5
8	Release paper width	40±1

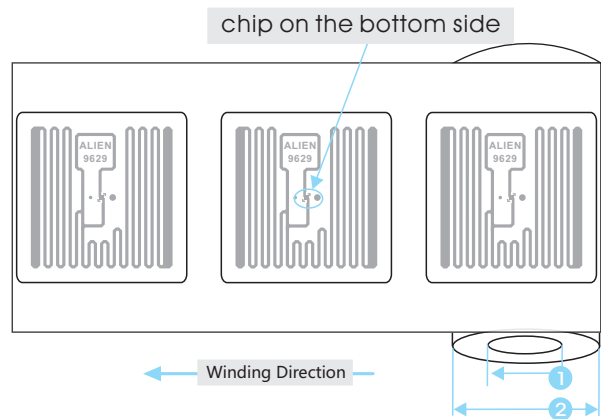


2. Electrical Specification


Item	Description	Remark
IC	Alien/Higgs3	
Substrate	PET	
Antenna Process	Aluminum ETCH(AL 9um)	
Protocols Supported	ISO/IEC 18000-6C EPC Class1 Gen2	
EPC	96 Bits	Read/write
TID	64 Bits	Read only
Password	32Bits Allers Password 32Bits Kill password	Read/write
User Memory	512 Bits	Read/write
Operating Frequency	860~960MHz	
Operating Mode	Passive	
Write Cycles	100,000	
ESD-HBM/CDM	2000V	HBM

3. Operating Warning

- 3.1 Inlays with black ink dot are for bad products, do not use. Position is shown on the right.
- 3.2 When carrying and applying inlays, keep away from water, violent bump and squeezing.
- 3.3
 Operating Limits : - 40 ~ 70°C / 20% ~ 90% RH.
 Storage Limits : - 20 ~ 50°C / 20% ~ 90% RH(Without condensation).
 The recommended storage temperature : 20 ~ 30°C / 50% RH.



4. Fault Structure

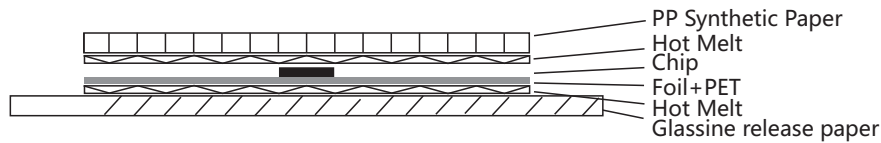

5. Package

Inlay Format in roll

Delivery Format 2500±10pcs/roll , 4 rolls/carton

Package Format 1, Waterproof, anti-collision, antistatic
 2, In antistatic bags